



Image Manual X2 pro/extreme web

User's Guide for Image Manual X2 pro/extreme web

Foreword

The information in this document is valid for the latest versions of the panel images at the time the document was released.

For information and updates, see <https://www.beijerelectronics.com>.

Order no: MAEN341

Copyright © 2022-03 Beijer Electronics AB. All rights reserved.

The information in this document is subject to change without notice and is provided as available at the time of printing. Beijer Electronics AB reserves the right to change any information without updating this publication. Beijer Electronics AB assumes no responsibility for any errors that may appear in this document. All examples in this document are only intended to improve understanding of the functionality and handling of the equipment. Beijer Electronics AB cannot assume any liability if these examples are used in real applications.

In view of the wide range of applications for this software, users must acquire sufficient knowledge themselves in order to ensure that it is correctly used in their specific application. Persons responsible for the application and the equipment must themselves ensure that each application is in compliance with all relevant requirements, standards, and legislation in respect to configuration and safety. Beijer Electronics AB will accept no liability for any damage incurred during the installation or use of equipment mentioned in this document. Beijer Electronics AB prohibits all modification, changes, or conversion of the equipment.

Contents

1	Introduction	4
1.1	Safety Precautions	4
1.2	References	5
1.3	Open source software notice	5
2	Boot	6
2.1	First time boot	6
3	Navigation	7
3.1	3.1 Configure context menu	7
4	Configuration	8
4.1	Change Configtool User password (PIN)	9
4.2	Change settings from terminal	10
4.3	Config tool tabs	12
4.3.1	General	12
4.3.2	Display	12
4.3.3	Network	13
4.3.4	Diagnostics	14
4.3.5	Licenses	14
5	Image Update	15
5.1	Updating the Panel Image using USB	15
5.1.1	Image update	15
5.1.2	Bootloader update	15
6	Certificate utility and allowlist	16
6.1	6.1 Adding certificate from file	16
6.2	Add current URL to the allow list	16

1 Introduction

1.1 Safety Precautions

Both the installer and the owner and/or operator of the operator panel must read and understand the manual.

1.2 References

Name	Description
MAEN215	Installation Manual X2 control/motion 7 - B2
MAEN221	Installation Manual X2 control/motion 10 - B2
MAEN225B	Installation Manual X2 control/motion 15 - B2
MAEN251B	Installation Manual X2 extreme 7 HP
MAEN256B	Installation Manual X2 extreme 12 HP
MAEN261B	Installation Manual X2 extreme 15 HP

The installation, technical data as well cutout and outline dimensions of the panels are described in the installation manual for each operator panel. Please refer to the Installation manual for further information.

Note:

Current documentation and software updates can be found on <http://www.beijerelectronics.com>

1.3 Open source software notice

To obtain the source code under GPL, LGPL and other open source licenses that are contained in this product, please contact opensource@beijerelectronics.com. In addition to the source code, all referred license terms, warranty disclaimers and copyright notices may be disclosed upon request.

2 Boot

1. Apply power to the operator panel.
2. Within 15–20 seconds, the **Browser** will appear.

If a start address is defined in the configuration, it will be loaded automatically. otherwise you will be directed to the configuration.

The X2 web is pre-configured from factory with a url to a HTML5 demo page.

2.1 First time boot

When powering up the X2 web device, first time from delivery, a dialog is shown in order to change the default Configtool user password, or PIN. The procedure is as follows:


1. At “Login as ConfigTool User”, input the factory default PIN (The default password from factory is 1234).
2. In the subsequent step, it is required to input the “Admin password”. This password is an additional password, similar to the PUK code on a mobile phone SIM card. The Admin password is printed on the flyer, included in the shipment.
3. With correctly stated Admin password, input the new PIN/Configtool User password, two times consecutively.
4. The PIN/Configtool User password is now changed.

3 Navigation

To reach the right click context menu, tap the touch surface and keep it pressed for at least 1.5 seconds. A drop down menu will show with navigation commands.

The following commands is currently implemented:

- Back
- Forward
- Reload

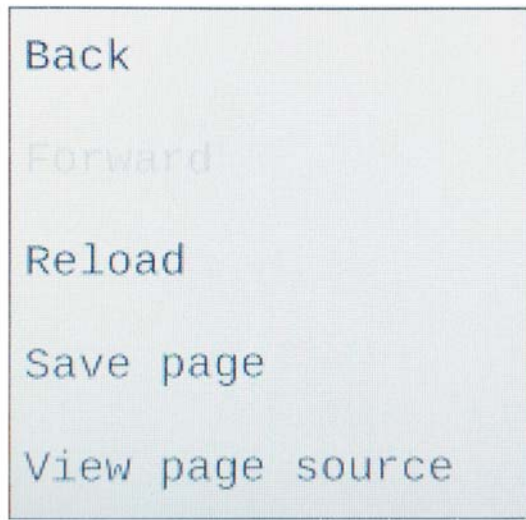

3.1 3.1 Configure context menu


The long-press context menu can be enabled or disabled in the settings by checking or unchecking the 'Disable context menu' checkbox, under the Display tab, inside the settings app.

4 Configuration

If there is no start address configured in the panel, the configuration will be shown after boot.

Perform the following steps to enter the configuration:

1. Apply power to the panel.
2. When the browser appears, swipe down with one finger from the top of the screen.
3. If the configuration UI is password protected, you will be prompted for a pin code.
 - Enter the PIN code that is printed on the flyer which is included in the shipment.

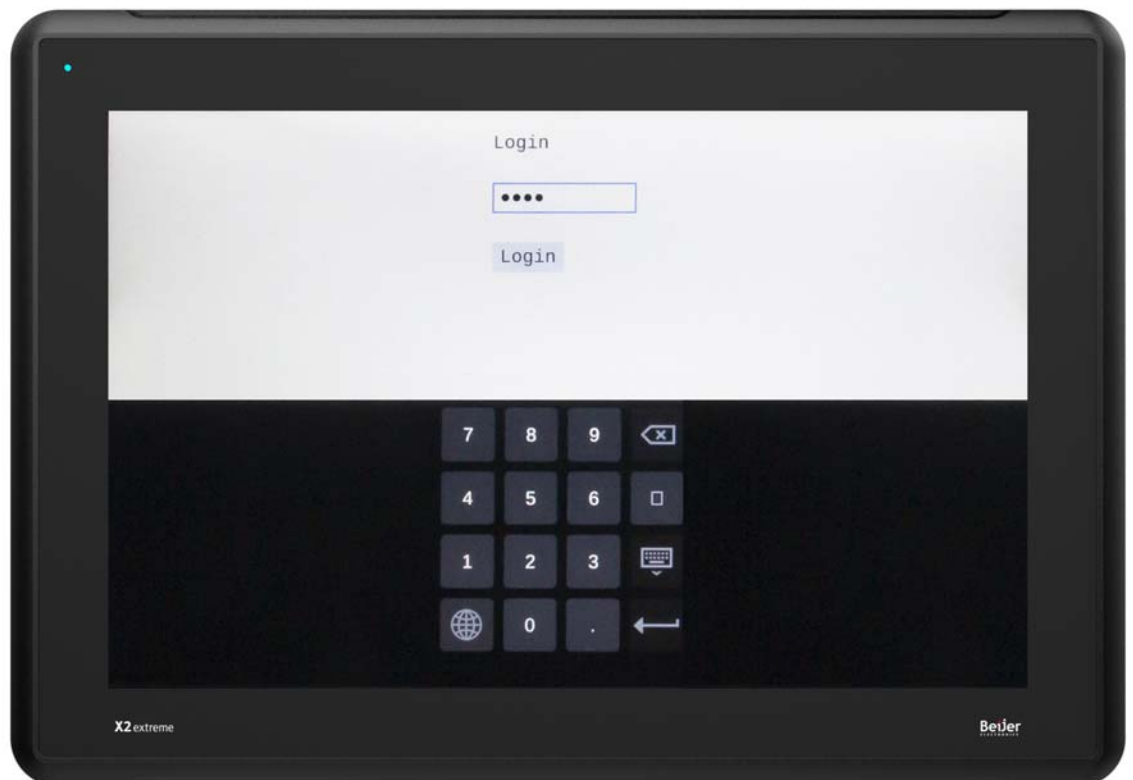


X2 extreme 15 web



X2 pro 15 web

4.1 Change Configtool User password (PIN)

To change the configtool user password, in the settings app, go to the Display tab and click the 'Change configtool password' button. The application will restart and prompt user to input the old configtool password. Next, in order to change the configtool password, the admin password has to be stated, prior to input the new configtool password twice.

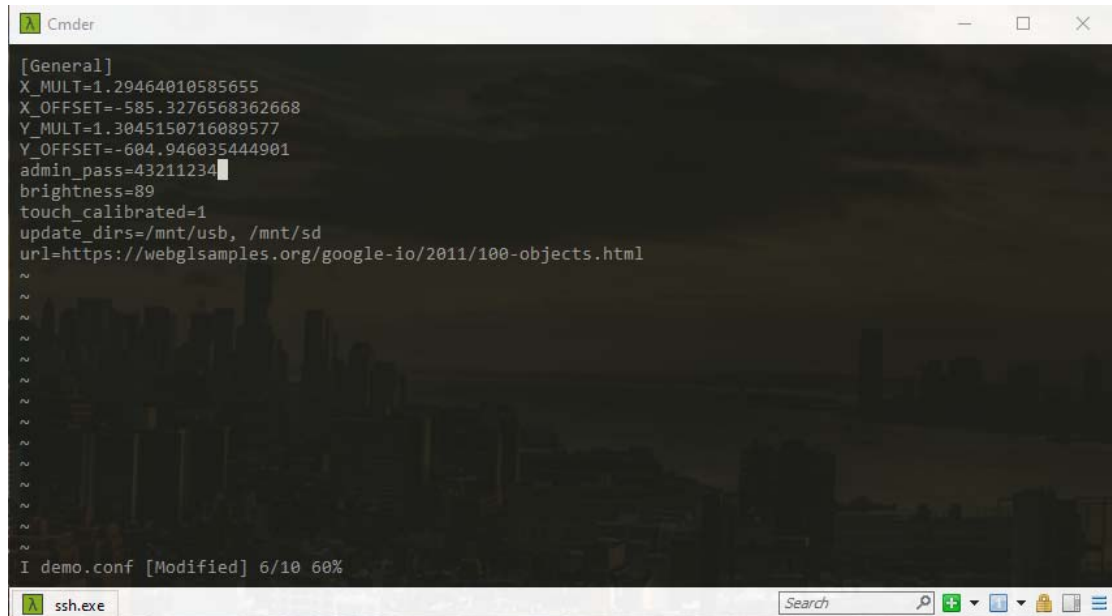A screenshot of a terminal window titled 'Cmder'. The window displays configuration settings for a device. The settings include: X_MULT=1.29464010585655, X_OFFSET=-585.3276568362668, Y_MULT=1.3045150716089577, Y_OFFSET=-604.946035444901, admin_pass=43211234, brightness=89, touch_calibrated=1, update_dirs=/mnt/usb, /mnt/sd, and url=https://webgl.samples.org/google-io/2011/100-objects.html. The terminal shows a cursor at the end of the admin_pass line. The bottom of the terminal shows 'I demo.conf [Modified] 6/10 60%'. The terminal window is running ssh.exe and has a search bar and several icons in the bottom right corner.

```
[General]
X_MULT=1.29464010585655
X_OFFSET=-585.3276568362668
Y_MULT=1.3045150716089577
Y_OFFSET=-604.946035444901
admin_pass=43211234
brightness=89
touch_calibrated=1
update_dirs=/mnt/usb, /mnt/sd
url=https://webgl.samples.org/google-io/2011/100-objects.html
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
I demo.conf [Modified] 6/10 60%
```

demo.conf

4.2 Change settings from terminal

The X2 web has some additional settings, which of some are only available to be edited from a terminal. The built-in editor in X2 web is *vi*. A basic manual to the various vi commands can be found here: <https://cs.stanford.edu/people/miles/vi.html>

The file `/etc/beijer/misc.conf` contains general settings.

Note:

Any changes made to the OS, file system etc. is solely on behalf of the owner. Beijer Electronics AB shall not be held responsible for any damages caused by connecting to the device as a root user.

```

[General]
brightness=100
login_valid_sec=1200
screensaver_timeout=0
update_dirs=/mnt/usb, /mnt/sd
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
I /etc/beijer/misc.conf 6/5 120%

```

misc.conf

Setting parameter	Type, interval	Comment
brightness	Integer [0, 100]	Controls the backlight brightness level. If the screen was mistakenly set to 0, from the config UI, this parameter can be edited from the terminal to solve the problem.
login_valid_sec	Integer [0, N] Rec. [120, N]	Controls the time until the user is automatically logged out from the config UI.
screen-saver_timeout	Integer [0 1, N]	Controls the screen saver timeout. If 0, the screen saver is disabled.
update_dirs	String, comma separated	The paths control which mounted interfaces are allowed for updating the firmware.
drawer_open_direction	string	Controls swiping direction for opening the Config [Down, Right, Left].

web.conf

Setting parameter	Type, interval	Comment
initscale_wor- karound	Bool [true, false]	Controls whether the workaround for known issues with progressive apps (also WebVisu SP14 zoom issues).
url	String	Address to the web server. Editing this parameter from terminal may be a better option in various deployment scenarios.
disable_con- text_menu	Bool [true, false]	Enables or disables the long touch menu as referred in section 3.

The file /etc/beijer/touch.conf only contains the result from touch calibration. It is recommended to use the built-in touch calibration app instead.

4.3 Config tool tabs

4.3.1 General

- Model – Model name of the device model.
- Software Version – Current installed software version.

4.3.2 Display

Tab	Description
URL	Start page
Load page	Makes the browser go to the URL.

Default scale fullscreen	Controls the zoomlevel and stretching of the web application. This is workaround for known issues in for instance Codesys WebVisu. If there are issues with the graphics, setting or resetting this parameter may help remedy the problem.
Brightness	Brightness setting for the display (scale 0-100).
Screen timeout	Set time before screen saver activates 30 sek - 10 min.
Activate	Start the screen saver immediately.
Calibrate touchscreen	Will initialize the calibration of the touch. The touch calibration screen enables the function to recalibrate the touch screen. The recalibration consists of nine steps, where a crosshair on the screen is pressed and held. Take care and try to do this as precise as possible, an incorrect calibration makes it hard to use the operator panel.
Change configtool password	Click button to change password/PIN.
Disable context menu	When checked, the long-press context menu in the browser is disabled.
Drawer Open Direction	Controls which direction to swipe to open the settings app, either Left, Right or Down.
Certificate Util/Allowlist	Utility to control white listed URL's as well as adding server certificates from either USB or SD-card.
Save button	The URL, your brightness and sceen time out.

Note:

Depending on the size of the screen, users may have to scroll down to find all setting parameters in the Display tab.

4.3.3 Network

The following parameters can be set:

- IP address
- Subnetmask
- Default gateway
- DNS settings for the Ethernet port on the operator panel

- LAN A / LAN B – One config per port (separate tabs in the top of the UI)
 - Method – DHCP or Static.
 - IP
 - Netmask
 - Gateway
 - DNS 1
 - DNS 2
 - Save – Saves the new settings.

The default setting for LAN A is: IP address 192.168.1.1, Subnet mask 255.255.255.0

4.3.4 Diagnostics

Displays the following list of parameters for the panel:

- CPU load
- System uptime
- Memory total
- Memory usage

4.3.5 Licenses

Shows a full table of all the licenses used in the software in terms of

- Package
- Version
- License

5 Image Update

The operator panel comes pre-loaded on delivery with an image.

5.1 Updating the Panel Image using USB

To update the image in an operator panel use a USB flash drive. This makes it possible to upgrade the panel image without the use of a PC.

5.1.1 Image update

It is possible to upgrade the panel image on an operator panel.

1. Download the **system-beijer.raucb** file and store it in the root on a USB memory.
2. Attach the USB memory stick to the device and turn on the power.
3. After booting up, a dialog will show to install the new version. A dialog will notify when the update is finished.
4. Detach the USB memory stick and reboot the device.
5. Check the new version number in the Configuration.

5.1.2 Bootloader update

1. Download the **bootloader-beijer.raucb** file and store it in the root on a USB memory stick.
2. Attach the USB memory stick to the device and turn on the power.
3. After booting up, a dialog will show to install the new version. A dialog will notify when the update is finished.
4. Detach the USB memory stick and reboot the device.
5. Check the new version number in the Configuration.

6 Certificate utility and allowlist

Connecting the X2 web browser to a server over TLS, which lacks a CA root authority signed SSL certificate is prohibited. To bypass X2 web from blocking, either the url can be added to a whitelist or users can install the server certificate on the X2 device as a valid server certificate. If a user connects to a web server, where the server lacks a valid certificate, the user will be notified by a message on the screen, 'Insecure Page'. The notifier will be displayed for 10 seconds.

6.1 6.1 Adding certificate from file

In order to add certificates from a file, the following has to apply:

- The USB thumb drive or SD-card is either vfat or ext3 formatted.
- The USB thumb drive or SD-card contains a certificate folder with *.crt files.

Attach the USB thumb driver or SD-card to the X2 web device and go to the Certificate Util/Allowlist dialog. All certificates found on the drive will be listed in the upper list. Select which certificate to be added, followed by clicking on the Add button. If the operation succeeded, the browser will restart. If the operation failed, users will be notified.

6.2 Add current URL to the allow list

To add the current url address to the allow list, simply check the 'Add current URL to allowlist' checkbox, followed by clicking the Add button. White listed url domain addresses are listed in the lower listbox. Existing, whitelisted, urls can be removed by selecting it and clicking the Remove button.



Head office

Beijer Electronics AB

Box 426

201 24 Malmö, Sweden

www.beijerelectronics.com / +46 40 358600